


Sand Hog 5000 Specifications:

- Internal Diameter 48"
- Thickness about 4"
- Pressure Rating 5,000 psi
- Weight 14,500 lbs
- Sand Capacity 100 lbs
- H2S / NACE Compliant
- Handle larger volumes of sand, gas and fluid than conventional vertical units
- 3" Downcomers Included
- 3" Adapters on all Connections
- Skid Mounted
- ASME Coded
- Performance Range >80% Effectiveness
 - Up to 6,000 BFPD
 - Up to 4mmscfd of gas
 - Ask your rep for an estimate of performance for your application



Sand Hog 5000 Operating Features:

1. Sacrificial Inlet
 - Removable patented sacrificial inlet with deflector plate directs the stream into the body of the sphere
 - Lessens the direct force of the stream and sand on the internal baffle to maintain its integrity but fully deflect and direct the stream into a circular pattern
2. Center Baffle & Sand Outlet Baffle
 - Center baffle's primary purpose is to direct flow but the length has been engineered below the inlet to create a gas/liquid interface which maximizes the time in cylinder of the liquid and solids to maximize the separation. This also helps to reduce the unit affects of slugging.
 - The sand outlet has a small set of fins which helps protect the sand at the bottom from being picked up and carried over by the production flow.
3. External Features
 - Skid mounted to protect unit and allow for easy hauling and setup
 - 3" adapters on all inlets and outlets
 - Built-in downcomers to allow for easy, speedy and SAFE rig up / rig down

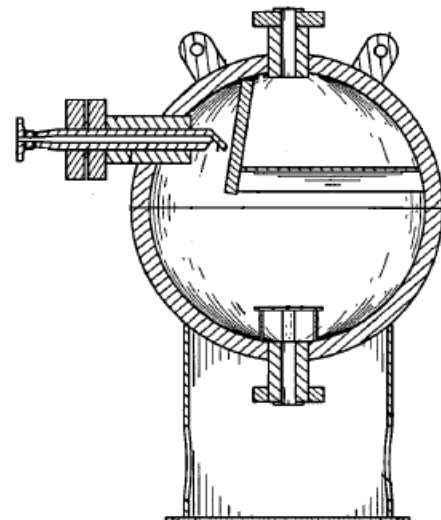

You Require. We Respond.

Greene's Energy Group, a completions and production-focused business servicing exploration and production companies, is ready to help with your next project in the Permian Basin, South Texas and other serviceable locations.

Greene's Energy Group values experience, knowledge, responsiveness and attention to safety as the keys to being a successful oil and gas service company.

Discover Greene's Energy Group at www.greenesenergy.com:

www.greenesenergy.com



For more information, please contact:

CORPORATE HEADQUARTERS

11757 Katy Freeway, Suite 700
Houston, TX 77079
Phone: 281-598-6830
Fax: 281-598-6868

WELL TESTING & FLOWBACK

2211 Industrial Boulevard
Alice, TX
361-664-1515

129 Ranch Road 6096-B
Laredo, TX
956-753-6565

10806 West County Road 74
Midland, TX
432-563-3345

6703 FM 1784
Pleasanton, TX
830-569-1921